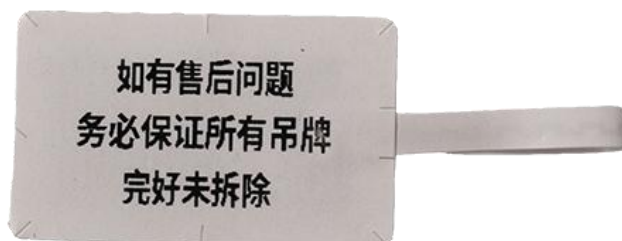# OR1104 Jewelry label specifications

如有售后问题
务必保证所有吊牌
完好未拆除

Introduction: Jewelry labels are specially designed for jewelry and accessories, which meet the industry application needs and habits. The surface of the label can be customized for printing, and custom graphics can also be printed in small batches. The unique anti-transfer design enables the label to be destroyed immediately when it is disassembled, and it can play the role of anti-demolition and anti-adjustment package.

Item	Parameter
Model	OR1104
Application	Logistics management, asset inventory, electronic
Size	34 * 71mm before folding; 17 * 28mm after folding
Material	Coated paper, synthetic paper, PET (customer choice)
RFID working protocol	ISO/IEC 18000-6C EPC Global Class 1 Gen 2
RFID working frequency	860~960 MHZ（Global)
Chip	IMPINJ R6/M5
Recognition distance	1~3 米/up to 10ft (US) (Related to identification equipment and environment)
Package	10000pcs/ctn
Weight	10kgs/ctn

Operating temperature	-40℃ ~85℃/ 7 years
Storage humidity	30% to 70%